


# Edit Previously Created TestNav Configuration


You can edit a previously created configuration.

## Step-by-Step


1. From **Setup**, select **TestNav Configurations**.

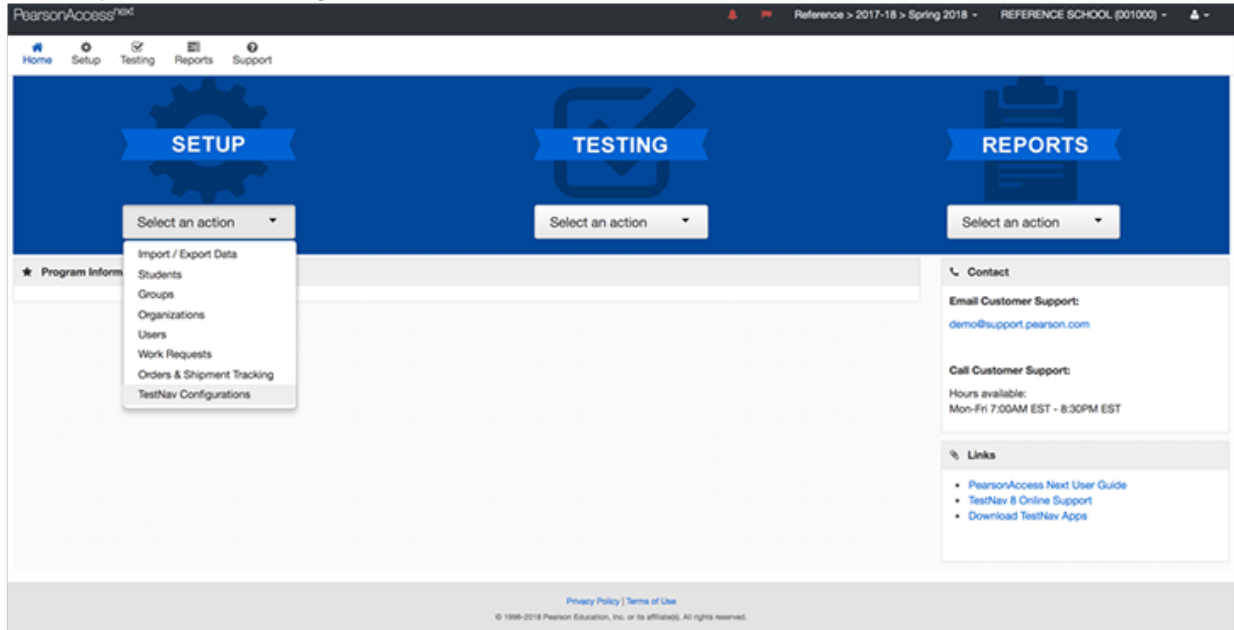


2. Type a configuration name into the search field, and click **Search**.

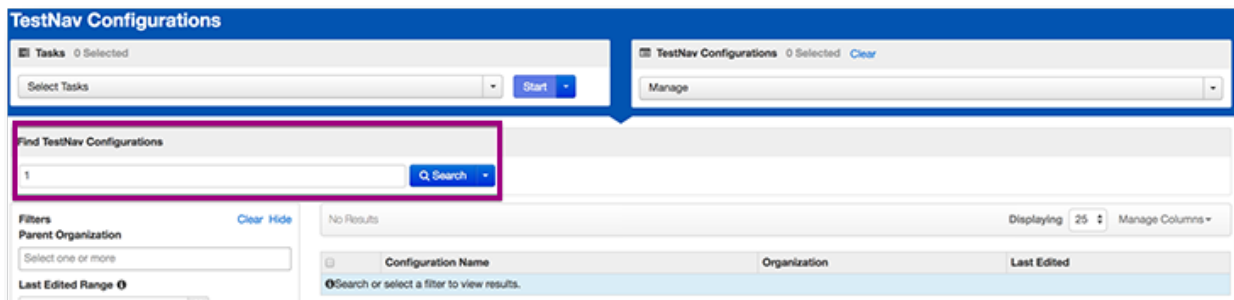

3. Click the checkbox next to the configurations.

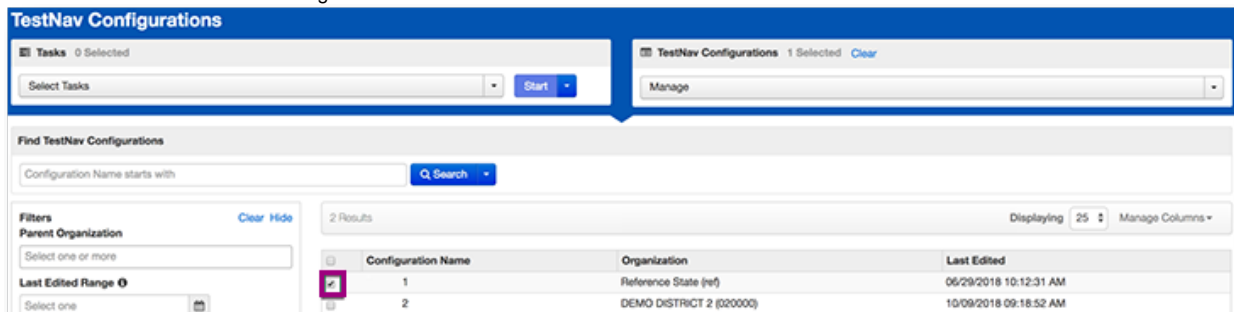

4. Click **Select Tasks**, select **Create / Edit TestNav Configurations**, and click **Start**.

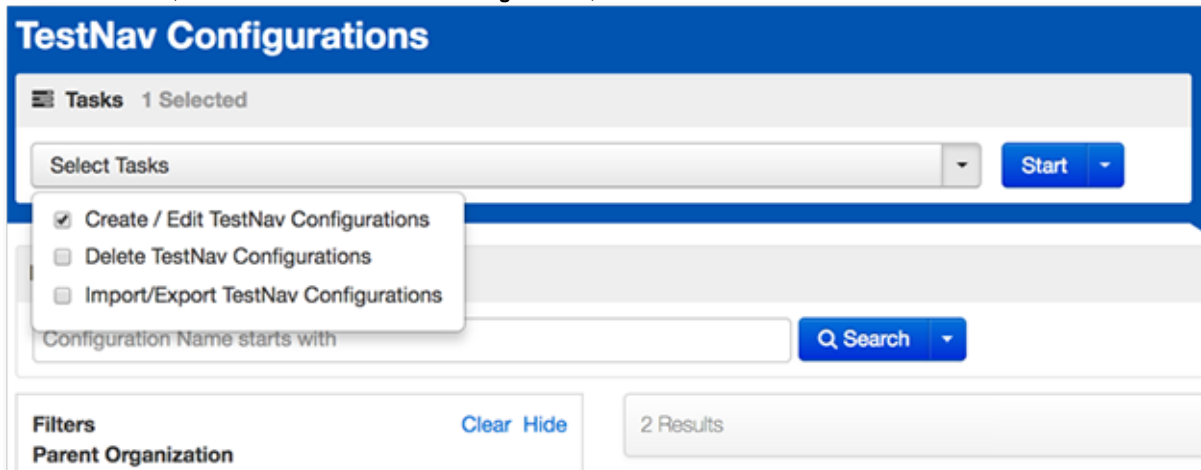

**TestNav Configurations**

Tasks 1 Selected

Select Tasks Start

- ☒ Create / Edit TestNav Configurations
- ☐ Delete TestNav Configurations
- ☐ Import/Export TestNav Configurations


Configuration Name starts with Q Search

Filters Clear Hide 2 Results

Parent Organization

5. Type/select details to the existing Precaching Computer associated with the organization.

- a. To add a Precaching Computer, click **Add** and enter details.

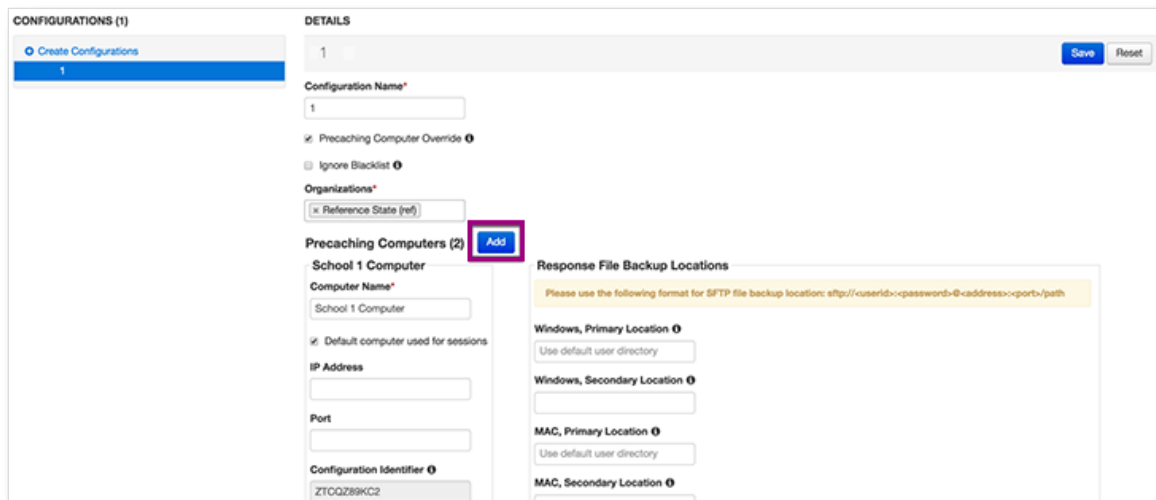

CONFIGURATIONS (1) Create Configurations

1

DETAILS Save Reset

1

Configuration Name\*

1

☒ Precaching Computer Override ⓘ

☐ Ignore Blacklist ⓘ

Organizations\*

Precaching Computers (2) Add

School 1 Computer

Computer Name\*

School 1 Computer

☒ Default computer used for sessions

IP Address

Port

Configuration Identifier ⓘ

ZTCQZ89KC2

Response File Backup Locations

Please use the following format for SFTP file backup location: sftp://userid:<password>@<address>:<port>/path

Windows, Primary Location ⓘ

Use default user directory

Windows, Secondary Location ⓘ

MAC, Primary Location ⓘ

Use default user directory

MAC, Secondary Location ⓘ

For more information about the Response File Backup Locations, see [Configure Response File Backup Locations](#).

6. Click **Save**.

## What's Next? (Optional)

When you complete configuring TestNav for proctor caching, you can create a session(s).