

Configure Response File Backup Locations

You can edit default settings for the primary backup location and add a secondary backup location. For information about TestNav, response file backups, and backup locations, refer to Set up and Use TestNav.

When specifying the SFTP path, the port number is optional. The default port number is 22.


- A relative path points to the local directory, and the URL contains a single forward slash or no slash.
- An absolute path is the defined complete path, and the URL contains two forward slashes.

Pearson recommends the following format for the SFTP backup location (port is optional):


sftp://<userid>:<password>@<address>:<port>/path.

Step-by-Step

1. From **Setup**, select **TestNav Configurations**.

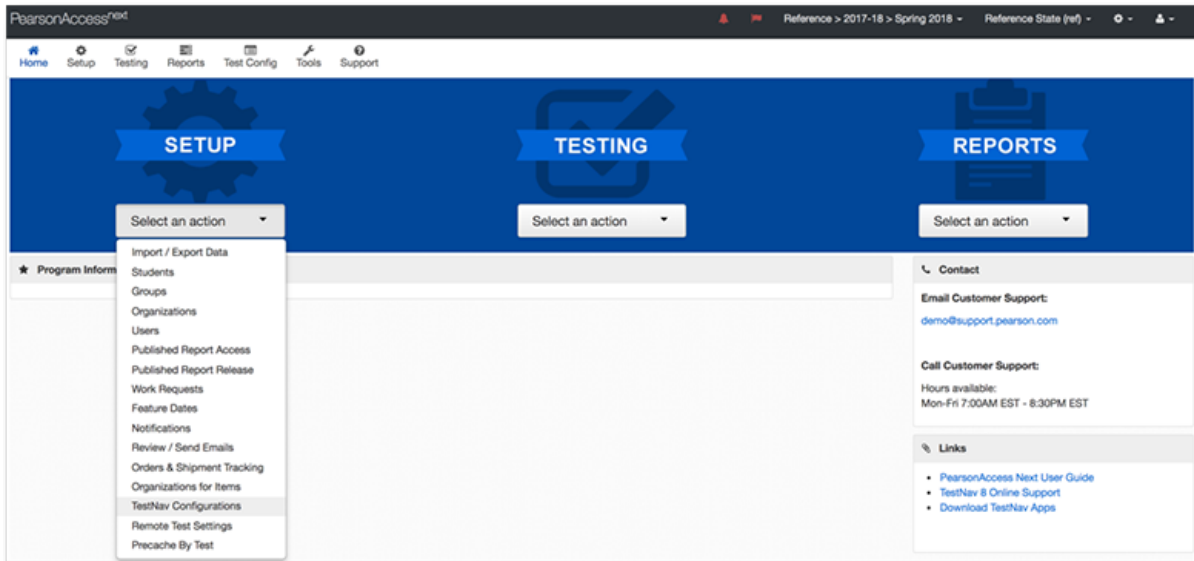

2. Type the configuration name into the search field, and click **Search**.

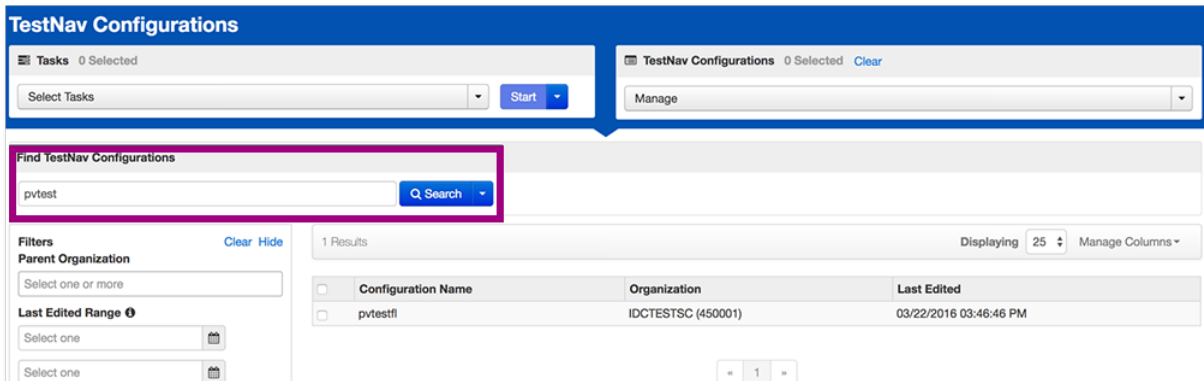

3. Click the checkbox next to the configuration you want to edit.

Find TestNav Configurations

pvtest Q Search

1 Results Displaying 25 Manage Columns

Configuration Name	Organization	Last Edited
<input checked="" type="checkbox"/> pvtestfl	IDCTESTSC (450001)	03/22/2016 03:46:46 PM

1

4. Click **Select Tasks**, select **Create / Edit TestNav Configurations**, and click **Start**.

TestNav Configurations

Tasks 1 Selected Start

Select Tasks

- ☒ Create / Edit TestNav Configurations
- ☐ Delete TestNav Configurations
- ☐ Import/Export TestNav Configurations

pvtest Q Search

1 Results Displaying 25 Manage Columns

Configuration Name	Organization	Last Edited
<input checked="" type="checkbox"/> pvtestfl	IDCTESTSC (450001)	03/22/2016 03:46:46 PM

5. Type or select the cache configuration details or update an existing configuration.

Create / Edit TestNav Configurations

CONFIGURATIONS (1)

[Create Configurations](#)

pvtestfl

DETAILS

pvtestfl Save Reset

Configuration Name*

pvtestfl

☐ Precaching Computer Override

Organizations*

x IDCTESTSC (450001)

Precaching Computers (1) Add

Shyam Workstation

Computer Name*

Shyam Workstation

☒ Default computer used for sessions

IP Address

lowacwl-264k5r1.peroot.com

Port

4480

Configuration Identifier

Response File Backup Locations

Please use the following format for SFTP file backup location: sftp://<userid>:<password>@<address>:<port>/path

Windows, Primary Location

Use default user directory

Windows, Secondary Location

MAC, Primary Location

Use default user directory

MAC, Secondary Location

For information about the other settings available on this page, see *Configure TestNav for ProctorCache*.

6. Click **Save**.

Create Configurations

pvtest1

SaveReset

Configuration Name*

pvtest1

Precaching Computer Override ⓘ

Organizations*

[x] ICTESTBSC (450003)

Precaching Computers (1) Add

Shyam Workstation

Computer Name*

Shyam Workstation

Default computer used for sessions

IP Address

10.0.0.1

Port

4480

Configuration Identifier ⓘ

Note: Confirm that firewall or content filtering software is open for both ports 4480 and 4481 of the precaching computer.

Test Connection

Response File Backup Locations

Please use the following format for SFTP file backup location: sftp://<username>:<password>@<address>:<port>/<path>

Windows, Primary Location ⓘ

Use default user directory

Windows, Secondary Location ⓘ

MAC, Primary Location ⓘ

Use default user directory

MAC, Secondary Location ⓘ

Android, ChromeOS, and iOS Secondary Location ⓘ

Linux, Primary Location ⓘ

Use default user directory

Linux, Secondary Location ⓘ

Note: Verify the connection to the Precaching Computer by opening a new browser window and navigating to http://<ip-address>:<port>. If the ProctorCache interface does not appear, reference the setup instructions or contact customer support.

* Required

SaveReset